



MAI399R - Remote on/off switch for pure sine inverter range. Allows discreet installation of inverter while controlling from remote location. Includes cable

MAI3001P POWER INVERTER 3000 WATT PURE SINE

- Converts 12VDC power from a battery into clean 240VAC power to run 240VAC appliances
- Pure Sine Wave output produces stable power the same as 240VAC mains connection to power sensitive electronic devices without interference to audio, displays or sensitive electronics
- Optional remote control allows discrete installation and control from a distance




REFERENCE GUIDE

Product	WATT	Product	WATT	Product	WATT
Digital Camera	10	Video Game Console	250	Small Microwave	1000
Mobile Charger	10	12" Electric Fan	300	Microwave	1300
Laptop Computer 14"	90	Electric Blender	450	Window Air Conditioner	1350
Hand Mixer	100	Electric Drill	500	Toaster	1400
Electric Cooler	160	Refrigerator	650	Hair Dryer	2200
LED TV	200	Food Processor	900	Evaporative Air Con	2600

SPECIFICATIONS

Output Power	3000W - 1 x USB2.0 (5V 2.1A) & 1 x USB-C (5/9/12V 18W)
Surge Power	6000W
Idle Power	≤ 2.0A
DC Input Voltage	11VDC to 15VDC
Output Voltage	210 - 240VAC (@ rated input voltage)
Output Frequency	50Hz +/-1Hz
Output Waveform	Pure Sine Wave
Efficiency	≥ 85%
Protection	Overload, Over/Under input voltage, Over temp, short circuit
Operating Temp	-10°C ~ 35°C
Cooling	Thermo-fans
Weight (kg)	6.5
Remote Control	Optional - Part No: MAI399R
Dimensions (mm)	489 x 250 x 100 (incl mounts)

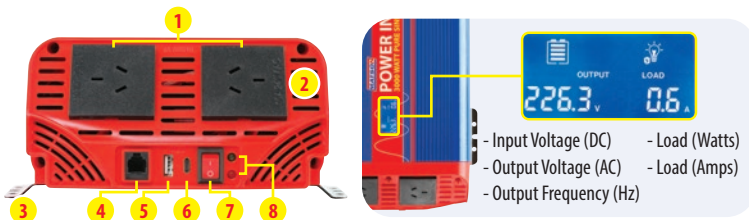

- 1 240VAC Outlet
- 2 Ventilation
- 3 Mounting Brackets
- 4 Remote Port
- 5 2.1A USB
- 6 2.4A USB-C
- 7 On/Off Switch
- 8 Status LED's

Note: Appliance specifications vary from brand to brand. Please see product label or consult manufacturer to determine specific usage for your application.



Two Great Stores to choose from...

7 Cemetery Rd,
Mackay QLD 4740

Phone 07 4957 6123

Unit 16, 547 Woolcock St,
Mt Louisa, Townsville QLD 4814

Phone 07 4774 7344