






**MAI399R** - Remote on/off switch for pure sine inverter range. Allows discreet installation of inverter while controlling from remote location. Includes cable

REFERENCE GUIDE					
Product	WATT	Product	WATT	Product	WATT
Digital Camera	10	Video Game Console	250	Small Microwave	1000
Mobile Charger	10	12" Electric Fan	300	Microwave	1300
Laptop Computer 14"	90	Electric Blender	450	Window Air Conditioner	1350
Hand Mixer	100	Electric Drill	500	Toaster	1400
Electric Cooler	160	Refrigerator	650	Electric Heater	2000
LEDTV	200	Food Processor	900	Electric Stove	2000

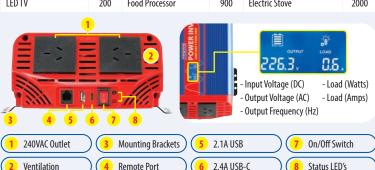

## MAI2001P POWER INVERTER 2000 WATT PURE SINE

- Converts 12VDC power from a battery into clean 240VAC power to run 240VAC appliances
- Pure Sine Wave output produces stable power the same as 240VAC mains connection to power sensitive electronic devices without interference to audio, displays or sensitive electronics
- Optional remote control allows discrete installation and control from a distance









SPECIFICATIONS				
Output Power	2000W - 1 x USB2.0 (5V 2.1A) & 1 x USB-C (5/9/12V 18W)			
Surge Power	4000W			
Idle Power	≤ 1.6A			
DC Input Voltage	11VDC to 15VDC			
Output Voltage	210 - 240VAC (@ rated input voltage)			
Output Frequency	50Hz +/-1Hz			
Output Waveform	Pure Sine Wave			
Efficiency	≥ 85%			
Protection	Overload, Over/Under input voltage, Over temp, short circuit			
Operating Temp	-10°C ~ 35°C			
Cooling	Thermo-fans			
Weight (kg)	5.3			
Remote Control	Optional — Part No: MAI399R			
Dimensions (mm)	410 x 250 x 100 (incl mounts)			

Note: Appliance specifications vary from brand to brand.

Please see product label or consult manufacturer to determine specific usage for your application.



Two Great Stores to choose from...

7 Cemetery Rd, Mackay QLD 4740 Phone 07 4957 6123 Unit 16, 547 Woolcock St, Mt Louisa, Townsville QLD 4814 Phone 07 4774 7344