


P3500i HAU

Compact & Lightweight



FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

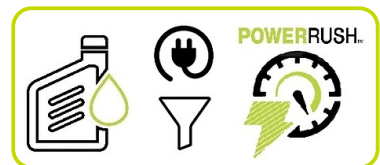

POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
Powerrush increases electrical current upon demand, above rated output when starting electric motors.

PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	3300
Rated Power	watt	3000



Engine


Engine Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Electric (+Recoil)	
Oil capacity	l	0.6
Low Oil Shutdown	✓	

Alternator

Voltage regulation system	Inverter
---------------------------	----------

Dimensional data

Length	(L) mm	601
Width	(W) mm	458
Height	(H) mm	552
Dry weight	kg	49.5
Carton box dimension LxWxH	mm	625x505x580

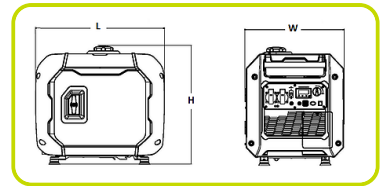

Autonomy

Fuel tank capacity	10	
Fuel consumption 75%	l/h	1.6
Running time 75%	h	6



Noise level

Guaranteed noise level (LWA)	dB(A)	88
Noise pressure level @ 7 m	dB(A)	61

GENSET CONTROL

COMMANDS

- Selector switch: O/I | Air choke Valve | Power Button
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel gauge
- Parallel kit receptacles

PROTECTIONS

- Overload; Oil Guard; Short Circuit; Overvoltage; Overtemperature
- Protection Control panel IP 44

OUTPUT:

- n°2 USB DC 5V 2A

SOCKET TYPE

AS/NZS 3112 15A 250V	2
----------------------	---



The information is aligned with the Data file at the time of download.
Printed on 08/11/2024 (ID 15534)

©2024 | PR Industrial S.r.l unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice



Two Great Stores to choose from...

7 Cemetery Rd,
Mackay QLD 4740
Phone 07 4957 6123

Unit 16, 547 Woolcock St,
Mt Louisa, Townsville QLD 4814
Phone 07 4774 7344