



### Specifications:

Model: ES12350	
Nominal Voltage	12V
<b>Rated Capacity</b>	
20 Hour Rate (1.75A to 10.8V)	35.0 Ah
Hourly rate conversion capacity	
10 Hour Rate (3.25A to 10.8V)	32.5 Ah
5 Hour Rate (5.96A to 10.5V)	29.8Ah
1 Hour Rate (22.0A to 9.6V)	22.0Ah
<b>Dimension and Weight</b>	
Length	195±2mm
Width	130±2mm
Height	164±2mm
Total Height	167±2mm
Weight	11.2Kg
Casing Material	ABS
Self discharge Rate (25°C)	≥91% /3 month
Internal Resistance	Fully charged Battery ≤ 11 mΩ
<b>Operating Temperature Range</b>	
Discharge	-15°C ( 5°F) ~ 50°C(122°F)
Charge	0 °C(32°F) ~ 40°C(104°F)
Storage	-15°C(5°F)~40°C(104°F)
<b>Charging Methods</b>	
Float Use	13.5V~13.8V(25°C), Compensation co-efficient-3mv/cell/°C
Cycle Use	14.7V~14.9V(25°C), Compensation co-efficient-5mv/cell/°C
Max Charge Current	0.25C(A)
Applications:	Solar power, Wind power, Telecom systems, UPS

### Discharge Characteristics

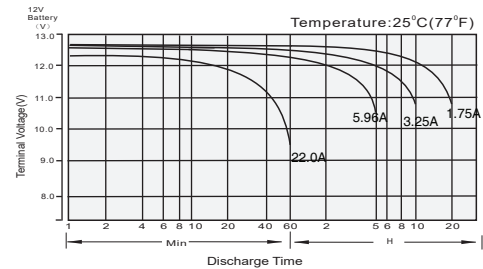

### Cycle Life in Relation to Depth of Discharge

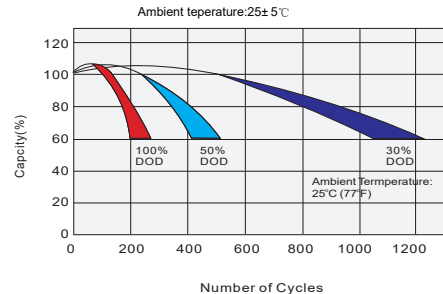

Two Great Stores to choose from...

7 Cemetery Rd,  
Mackay QLD 4740  
Phone 07 4957 6123

Unit 16, 547 Woolcock St,  
Mt Louisa, Townsville QLD 4814  
Phone 07 4774 7344