






MBTX12U



Terminal Dimensions (mm)

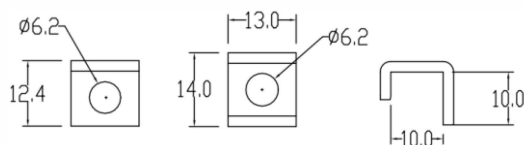

Physical Dimensions (in./mm)

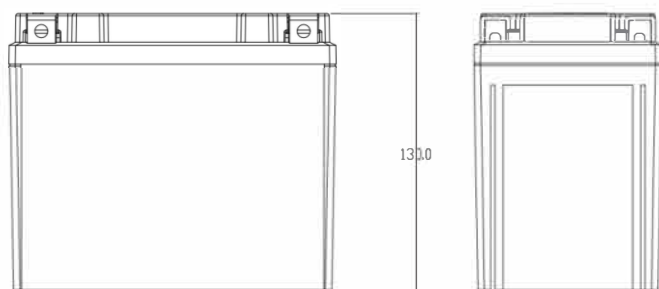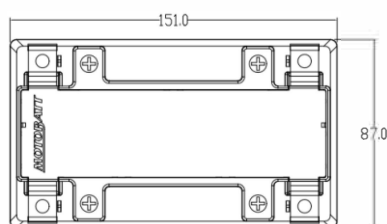

Length: 5.94in(151mm) Width: 3.43in(87mm)
Height: 5.12in(130mm) Total Height: 5.71in(145mm)

Tolerances are ± 0.04 inches (± 1 mm) and ± 0.08 inches (± 2 mm) for height.

Features

- Patented Quad Terminal Design-Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat(AGM)technology
- Brass Terminals- superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-ready to Install

Performance Specifications

Nominal Voltage ----- 12 volts(6cells)

Nominal Capacity 25°C(77°F)

20-hr. (0.70A to 10.50 volts) ----- 14.84AH

10-hr. (1.40A to 10.50 volts) ----- 14.0AH

5-hr. (2.8A to 10.20 volts) ----- 11.48AH

1C. (14.0A to 9.60 volts) ----- 6.30AH

3C. (42.0A to 9.60 volts) ----- 5.04AH

Approximate Weight ----- 9.70lbs. (4.40kg)

Energy Density (20-hr rate) ----- 1.66W-h / in³ (101.2W-h/l)

Specific Energy (20-hr rate) ----- 17.8W-h / lb (39.3W-h/kg)

Internal Resistance (approx) ----- 18 milliohms

CCA(-0 4°F/-18°C,7.2V,30S) ----- 210 amperes

CA(68°F/-20°C,7.2V,30S) ----- 275 amperes

Shelf Life (% of normal capacity at 68°F/20°C).....SOC% OCV

1 months ----- 97% 12.78V

3 months ----- 91% 12.70V

6 months ----- 83% 12.5V


Operating Temperature Range

Discharge ----- -4°F(-20°C) to 122°F(50°C)

Charge ----- -40°F(-40°C) to 140°F(60°C)


Case ----- ABS

Warranty ----- 1 year

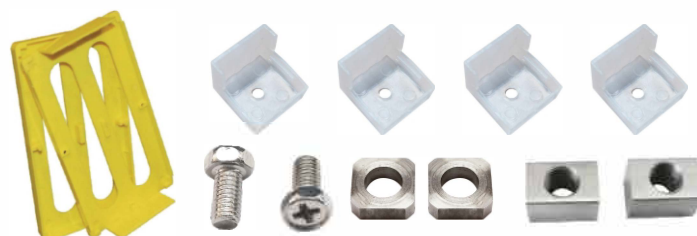





Shelf life & Storage

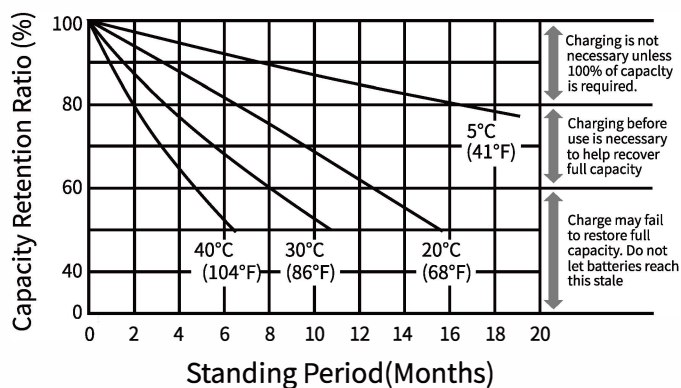


Discharge Characteristics

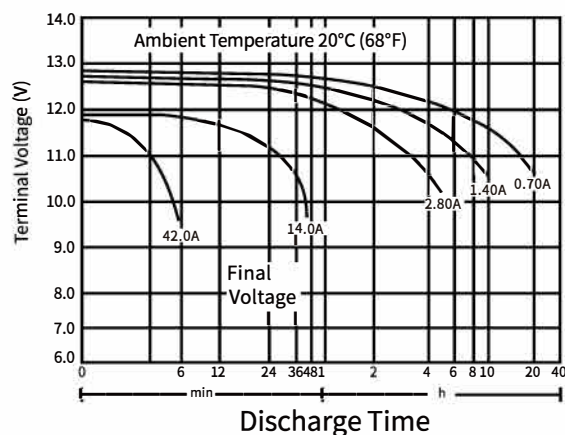

Discharge Time vs. Discharge Current

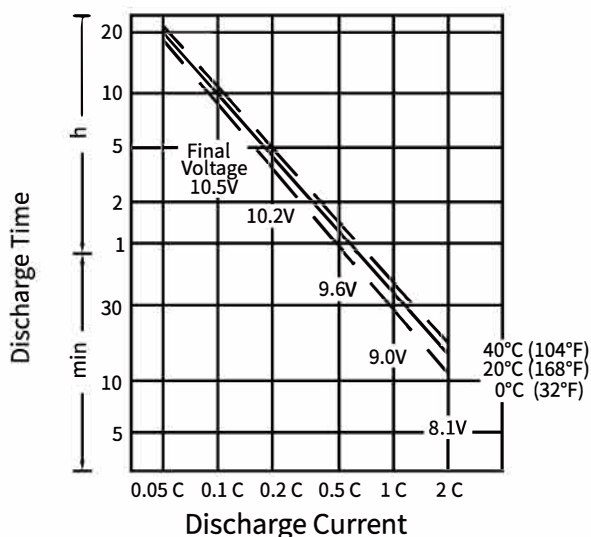

Life Characteristics in Cyclic Use

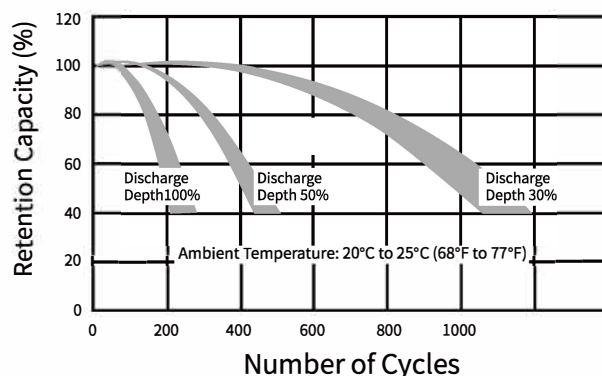

Charging

Cycle Applications: Limit initial current to 0.2C. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 275 mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com

Can be used to replace

YB12B-B2	YTX12-BS	YTX12	YTX14-BS
YTX14	YTX14L	YTX14H	YTX14HBS
YTX14LBS	KMX14BS	YTX15	YTX15L
YTX15L-BS			

Further information

Please refer to our website www.motobatt.com to locate a distributor in your area.