BATTERY DATA SHEET









MF | MAINTENANCE FREE

REF BTX14AH-BS



12v VOLTAGE-v

210A CCA - A

12.6Ah CAPACITY - Ah (20Hr)

TECHNOLOGY


- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold

DIMENSIONS

Length (A): Width (B): Container height: Total height (C): 133±2mm 90±2mm 164±2mm 164±2mm

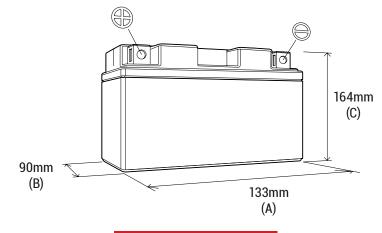


UPGRADE FOR

WEIGHT

Battery (with acid):

Approx 4.71kg

MOUNTING ANGLE

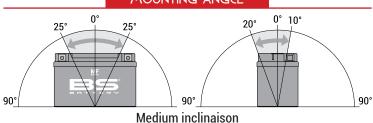

TERMINALS

