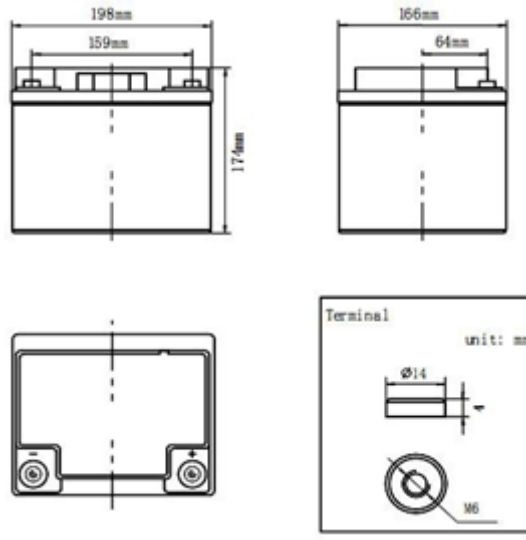


CHARACTERISTICS		
Nominal Voltage		12V
Nominal Capacity (20 hour rate)		48Ah
Capacity 25°C	10 hour rate (9.0A)	43.0Ah
	5 hour rate (15.9A)	38.0Ah
	1 hour rate (55.4A)	26.0Ah
Internal Resistance		Full Charged Battery 25°C $\leq 10m\Omega$
Capacity affected by Temperature (10 hour)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge 25°C Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C	Float	Initial Charging Current Less than 10A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 10A Voltage 14.4-14.9V

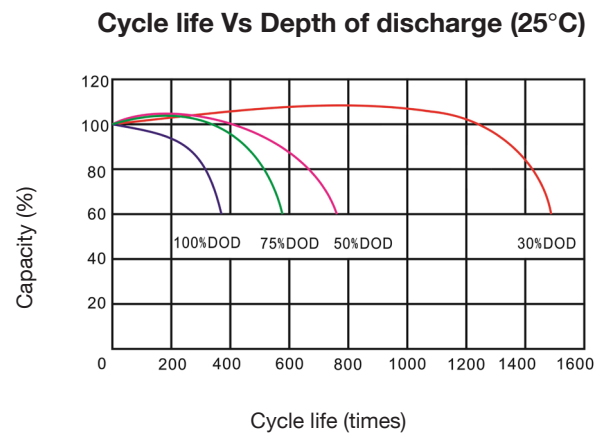
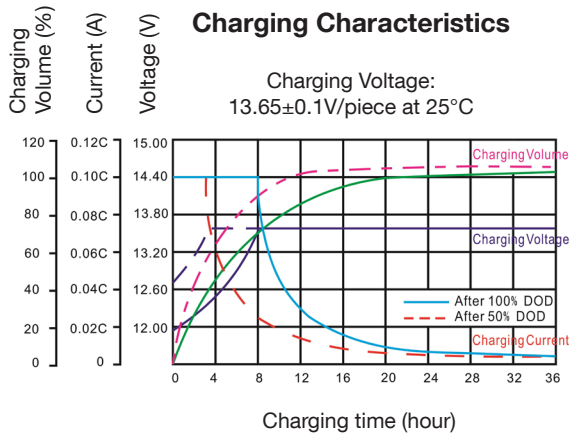


PACKAGING		
Battery Dimensions	Length	198mm
	Width	166mm
	Height	174mm
	Total Height	174mm
Quantity Per Box	1 PC per box	
Net weight Per Box	14.2kg	
Gross Weight	14.7kg	

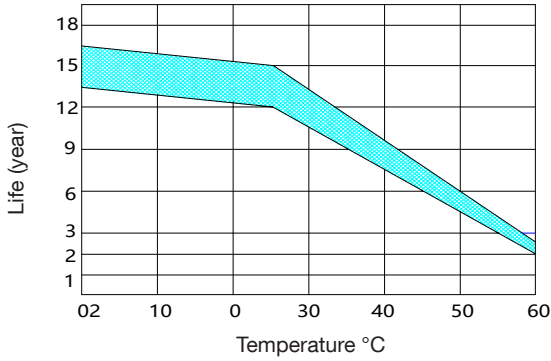
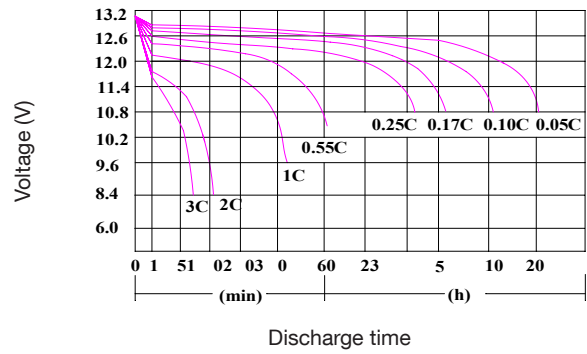
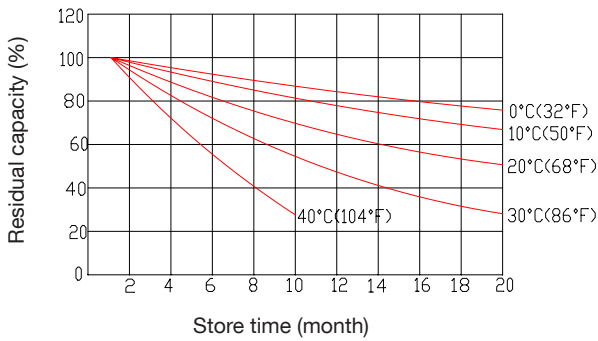
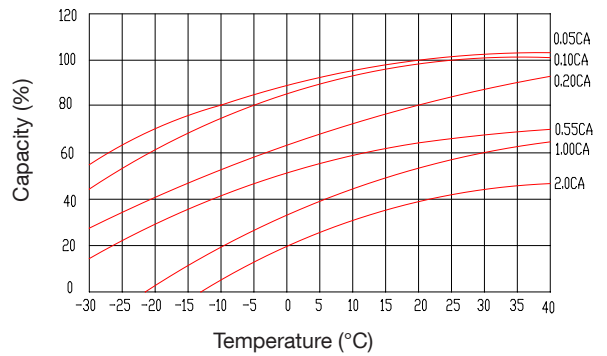
**Discharge Constant Current per Cell (Amperes at 25°C)**

F.V/Time	30min	1h	2h	5h	10h	20h
1.60V	32.9	22.2	14.1	6.7	4.0	2.2
1.65V	32.3	21.8	13.8	6.6	3.9	2.16
1.70V	31.7	21.4	13.6	6.5	3.8	2.12
1.75V	31.1	21.0	13.3	6.4	3.7	2.08
1.80V	29.9	20.2	12.8	6.1	3.6	2.00

**PERFORMANCE CHARACTERISTICS**



**Temperature effect on designed float life**

 Float charging Voltage:  
 13.65±0.01V/piece at 25°C

**Discharge characteristics (25°C)**

**Temperature effect on battery self-discharge**

**Temperature effect on capacity**

**BATTERY CONSTRUCTION**

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid

**Two Great Stores to choose from...**
**7 Cemetery Rd,  
 Mackay QLD 4740  
 Phone 07 4957 6123**
**Unit 16, 547 Woolcock St,  
 Mt Louisa, Townsville QLD 4814  
 Phone 07 4774 7344**