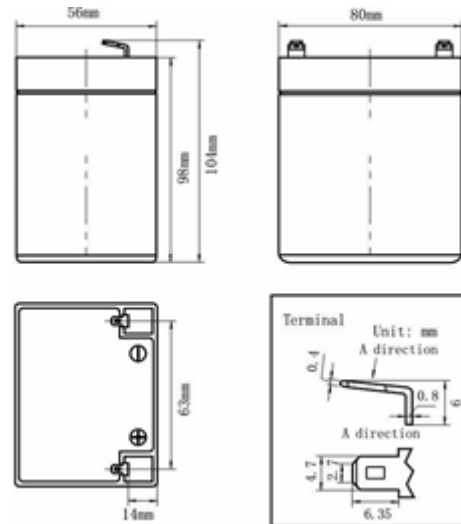
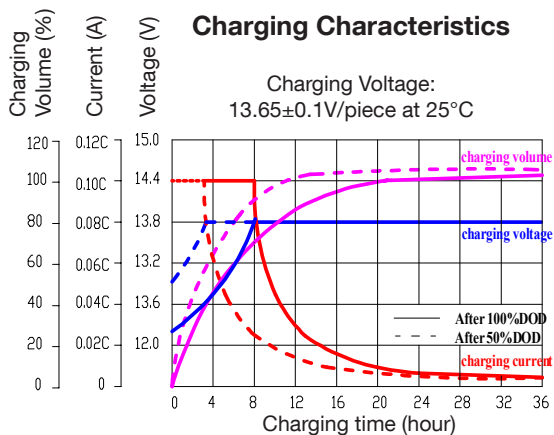
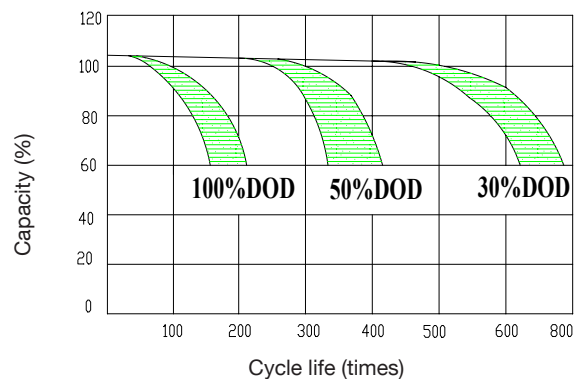


CHARACTERISTICS		
Nominal Voltage		12V
Nominal Capacity (20 hour rate)		2.9Ah
Capacity 25°C	10 hour rate (9.0A)	2.8Ah
	5 hour rate (15.9A)	2.6Ah
	1 hour rate (55.4A)	1.91Ah
Internal Resistance Full Charged Battery 25°C		≤37mΩ
Capacity affected by Temperature (10 hour)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge 25°C Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C	Float	Initial Charging Current Less than 0.9A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 0.9A Voltage 14.4-15.0V

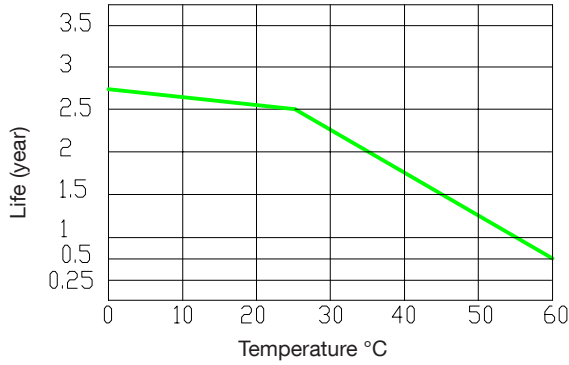
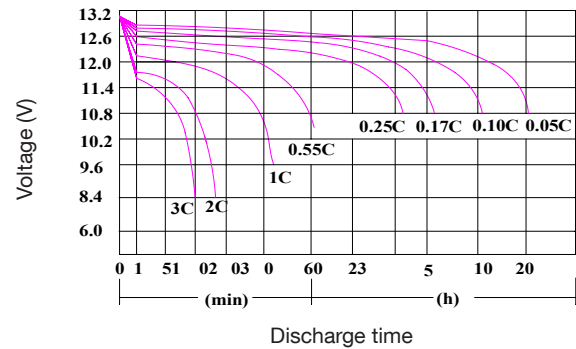
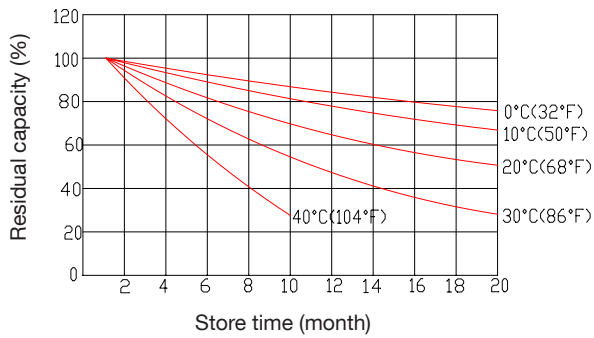
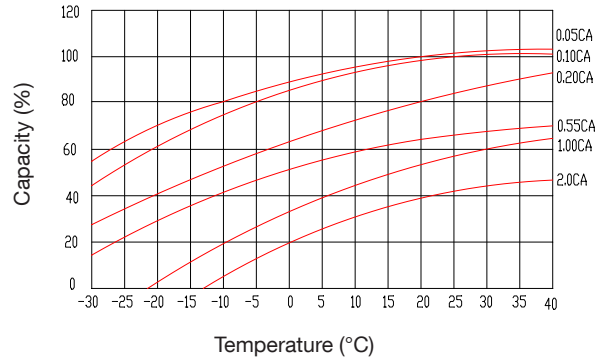
PACKAGING		
Battery Dimensions	Length	80mm
	Width	55.5mm
	Height	98mm
	Total Height	
Quantity Per Box	20 pcs per box	
Net weight Per Box	22.8.kg	
Gross Weight	23.3kg	


Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	30min	1h	2h	5h	10h	20h
1.65V	3.13	1.88	1.17	0.54	0.30	0.16
1.70V	3.07	1.84	1.15	0.53	0.29	0.15
1.75V	3.02	1.81	1.13	0.52	0.29	0.15
1.80V	2.90	1.74	1.09	0.50	0.28	0.15

PERFORMANCE CHARACTERISTICS

Cycle life Vs Depth of discharge (25°C)


Temperature effect on designed float life

 Float charging Voltage:
 $13.65 \pm 0.01 \text{V/piece at } 25^\circ\text{C}$

Discharge characteristics (25°C)

Temperature effect on battery self-discharge

Temperature effect on capacity

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid

Two Great Stores to choose from...

 7 Cemetery Rd,
 Mackay QLD 4740

Phone 07 4957 6123

 Unit 16, 547 Woolcock St,
 Mt Louisa, Townsville QLD 4814

Phone 07 4774 7344