



HGL200-12

12-Volt,200AH@20HR

**Valve Regulated
Lead-Acid Battery**





**Design for Standby
Power Applications**

Life Expectancy: Expected trickle life: 6-8 years at 25°C.	Application UPS, Telecom Systems, Switch Boards, Lawn Mowers, Photovoltaic Systems.
----------------------------------------------------------------------	-----------------------------------------------------------------------------------------------

Specifications	
Nominal Voltage	12V(6 cells per unit)
Rated Capacity	200AH @20HR-Rate to 1.75V per cell@25°C
	186AH @10HR-Rate to 1.75V per cell@25°C
	170AH @5HR-Rate to 1.70V per cell@25°C
	120AH @1HR-Rate to 1.60V per cell@25°C
Weight	Approx. 57.6kg (100.54lbs.)
Max. Short-Duration Discharge Current	2000 A (5S)
Internal Resistance of charged battery	Approx.3.0 mΩ
Short Circuit Current	4100 A
Operating Temperature Range	
Nominal Operating Temperature	25°C (77°F)
Discharge	-15°C~+ 50°C 5°F~122°F
Charge	-15°C~+40°C 5°F~104°F
Storage	-15°C~+40°C 5°F~104°F
Capacity affected by Temperature (20 hour rate)	40°C (104°F) 102%
	25°C (77°F) 100%
	0°C (32°F) 85%
	-15°C (5°F) 65%
Capacity loss per month at 20°C	<3%

Mechanical Specifications		
Overall Height (H)	218±2.0mm	8.58"
Container Height (h)	214±2.0mm	8.43"
Length (L)	530±2.0mm	20.87"
Width (W)	209±2.0mm	8.23"
Terminal	M8 Female threaded terminal	
Terminal Torque	7.0 ~9.0 N.M	
Container Material	Standard	ABS (UL 94-HB)
	Optional	ABS Flame Retardant (UL94-VO)
Sealed Construction	Can be operated in any position without leakage.	
Charge Characteristics		
Trickle use	Initial current	No limit
	Control Voltage	13.5 to 13.8 VDC/unit(25°C)
Cycle use	Initial current	50 A or smaller
	Control Voltage	14.40~14.9VDC/unit (25°C)
Charging Temperature Compensation	Cycle use	-4mV/cell/°C
	Float use	-3mV/cell/°C
CAUTION : Do not charge in a sealed container.		

DIMENSIONS (All units shown in mm)

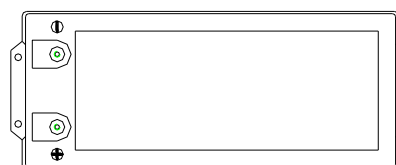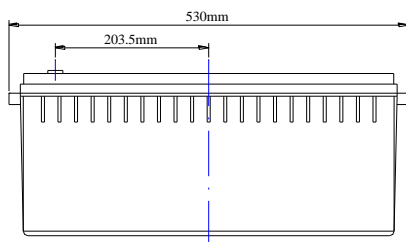

Constant Current Discharge Rating Amperes @ 77°F (25°C)											
Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H
1.75V	278	188	137.2	114.2	64.7	49.0	33.3	22.75	18.60	15.83	10.00


Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




Fullriver Battery
This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs specification are subject to modification without notice. Contact Fullriver for the latest information.




Discharge Characteristic Curves at 25°C (77°F)

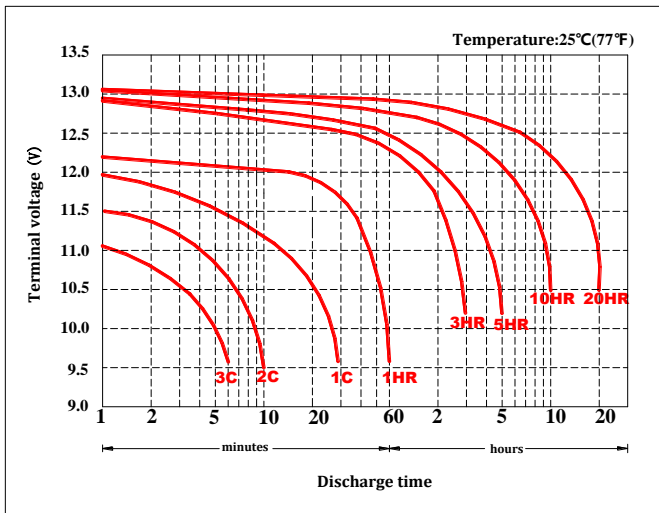


Temperature Effects In Relation to Battery Capacity

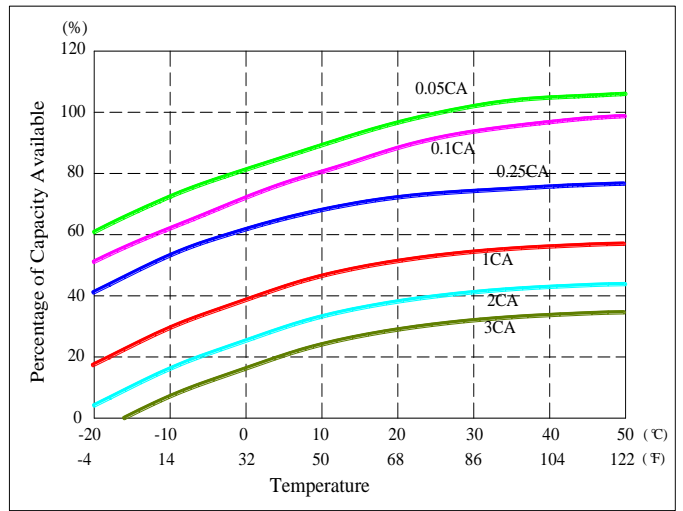


Capacity Retention Characteristic

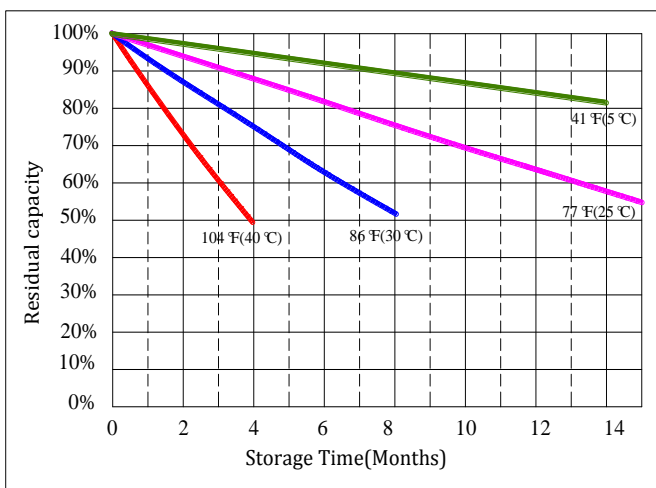

State of Charge (SOC) vs Open Circuit Voltage (OCV)

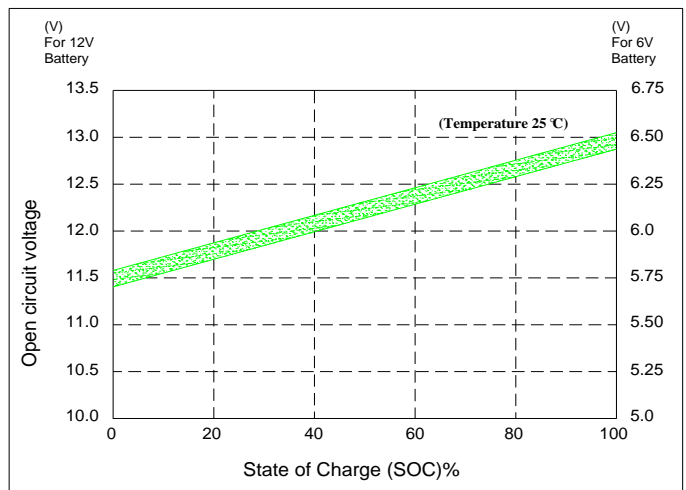

Cycle Life vs. Depth of Discharge (DOD)

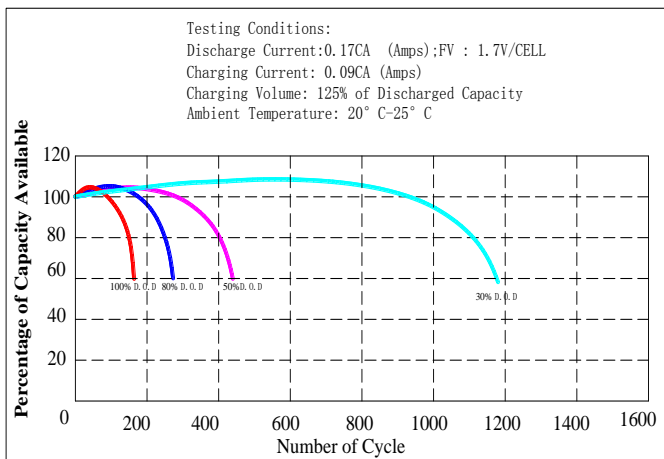

Float Service Life

