12V | 1000A

**GB40** 



# START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™





# **INTERFACE**

#### **POWER LED**

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



# **POWER BUTTON**

Push to turn unit "On" & "Off".



# **CHARGE LED**

Indicates the charge level of the internal battery.



# **BOOST LED**

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



#### **LIGHT MODE BUTTON**

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOŠ > Blink > Strobe > Off



# **ERROR**

Blinks "on" and "off" when the internal battery is too hot/too cold.





# **MANUAL OVERRIDE.**

Press and hold the manual overide button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



# WHAT'S IN THE BOX

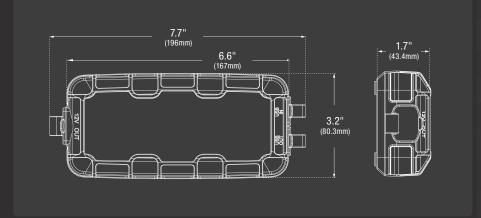

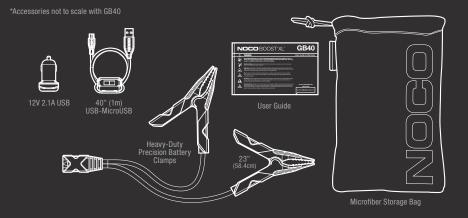



# **CHARGE DEVICES.**

Recharge your personal devices on the go, like smartphones, tablets, e-watches and more - up to 4 smartphone recharges.

RECHARGE TIME		
0.5A	12hr	
1A	6hr	
2Α	3hr	

# **TECHNICAL SPECIFICATIONS**

I LUIIIIIUAL UI	of Edit Idaliano		
INTERNAL Battery:	24 Watt-Hour Lithium Ion		
PEAK CURRENT Rating:	1000A		
OPERATING Temperature:	-4°F to +122°F (-20°C to +50°C)		
CHARGING Temperature:	32°F to +104°F (0°C to +40°C)		
MICRO USB (INPUT):	5V, 2.1A		
USB (OUTPUT):	5V, 2.1A		
HOUSING Protection:	IP65 (w/Ports Closed)		
COOLING:	Natural Convection		
UNIT WEIGHT:	1.65 lbs (0.74kg)		
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	2.4 lbs (1.08kg)		
LED FLASHLIGHT:	100 Lumens		
VOLUMETRICS:	Retail Packaging:	Master Carton:	





3.62"x4.57"x8.27"
Weight: 2.75lbs
UPC: 0-46221-15002-5

Inner Carton: Dimensions: 4.01"x8.78"x5.12"









9.25"x12.60"x11.22" Weight: 18.30lbs

Units Per Pallet: NA - 360 Units EU - 270 Units

Quantity: 6 UCC: 10046221150022



7 Cemetery Rd, Mackay QLD 4740

Phone 07 4957 6123

Unit 16, 547 Woolcock St, Mt Louisa, Townsville QLD 4814 Phone 07 4774 7344

